


Delta-Shrink

Servo Powered ShrinkSleeving

The Delta Shrink Labeler uses a rugged servo motor to control the Sleeve length. This means that the sleeves can be virtually any length, simply just program-in the length required.

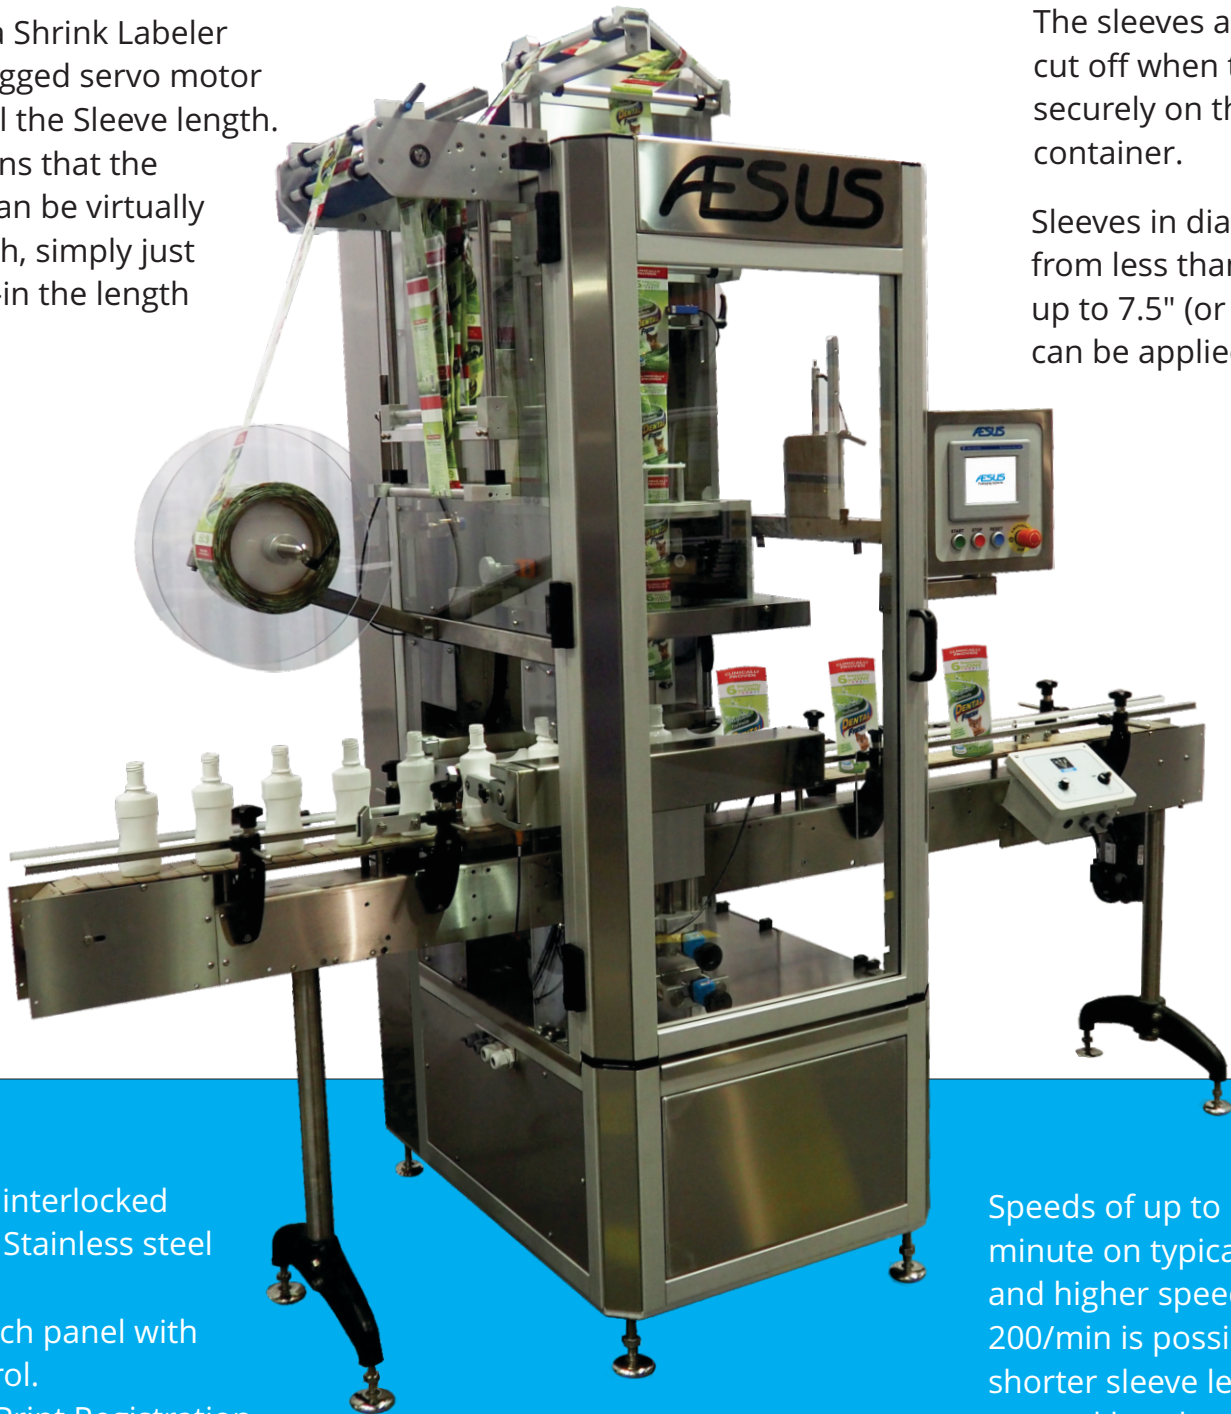

The sleeves are only cut off when they are securely on the container.

Sleeves in diameter from less than ½" up to 7.5" (or more) can be applied.

Aesthetic interlocked Guarding Stainless steel stand.
Color Touch panel with PLC Control.
Optional Print Registration and Perforation.

Speeds of up to 120 per minute on typical sleeves and higher speeds 200/min is possible for shorter sleeve lengths – eg. neckbands.



Unique Mandrel application

Our speciality is to apply the band or sleeve using a Mandrel that closely mimics the container or neck diameters.

The Mandrel opens the sleeve to its widest possible configuration and then we apply the sleeve and cut it to length. This means that the shrink will be better (as there is less shrink required) and there is material cost savings which overtime, can be considerable.

Shrink Tunnels



Shrink Tunnels are available from simple direct air blow units for neck bands, through larger units including infrared Radiant heat models 24", 36" and 48",

For the best shrink available you should use a Steam tunnel or consider our exclusive Patented Hybrid Heat/Steam model